905

Mid Tower

Redefining Craftsmanship

Intricate details are engineered throughout the 905 that requires extensive production time. The 4mm aluminium shell is bent and presented with a classic hairline finish. The front LED display enforces 15 precise cuts to ensure quality craftsmanship.



ARGB Mode

The 905’s front LED display is ARGB (3-pin, 5V), simply connect to an ARGB motherboard to synchronize the LEDs with the entire system. If your motherboard doesn’t feature an ARGB header, the lighting will be placed on a default setting (InWin LED mode).

ASUS AURA SYNC

RGB msi MYSTIC LIGHT SYNC

GIGABYTE RGB FUSION READY

ASRock POLYCHROME SYNC

OLED Display

The 905’s OLED display offers multiple functions for customization. Use photos, apply text, install a GIF, reveal the time, display system performance or just enjoy the light show all with the InWin software. Toggle these functions by pressing the designated side button.

Quick-Release Side Panel

The 905 flaunts a sleek, clean exterior. Since the tinted tempered glass are windows to the soul of a PC, the 905 is free of thumbscrews and presents user-friendly rear quick-release buttons. Remove the side panels by simply pressing a button.

Multiple Liquid Cooling Options

In addition to its sleek and gorgeous design, the 905 is excellent in terms of cooling performance. Up to a 360mm radiator can be placed at the bottom, up to 240mm radiator in front and a 120mm radiator in the rear. Plenty of options for flexible cooling solutions.

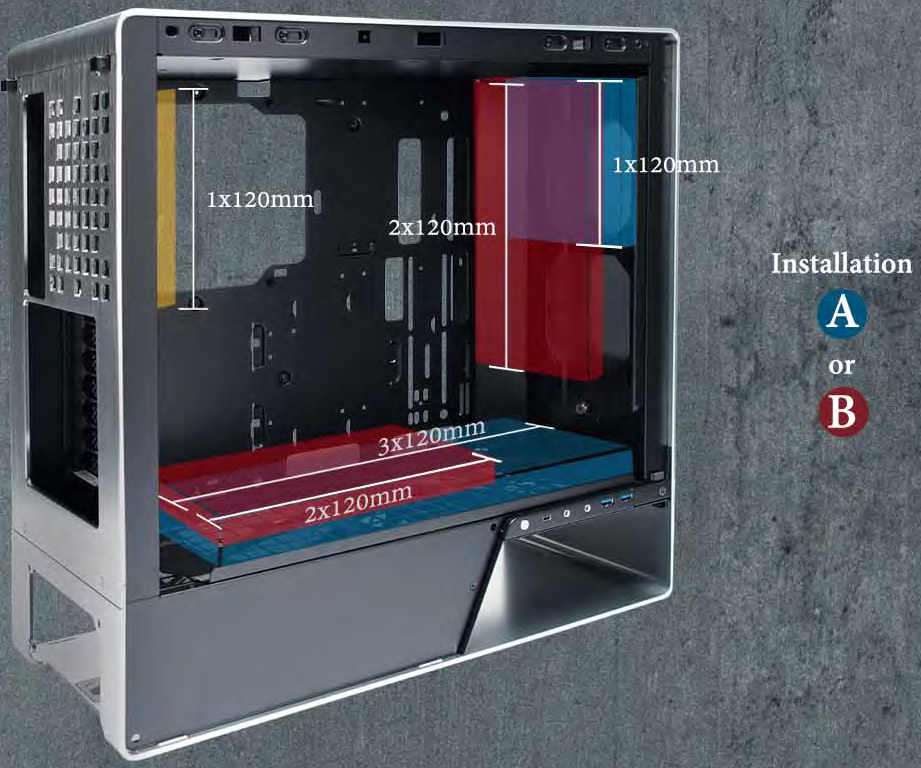

Max. Motherboard 12” x 13 “ (305mm x 330 mm)

Max. HDD x 1 **Max. SSD x 4**

160mm **230mm PSU**

330mm Graphics Cards

PSU Chamber Accommodates High-End PSU

User-Friendly Anti-Dust Filter

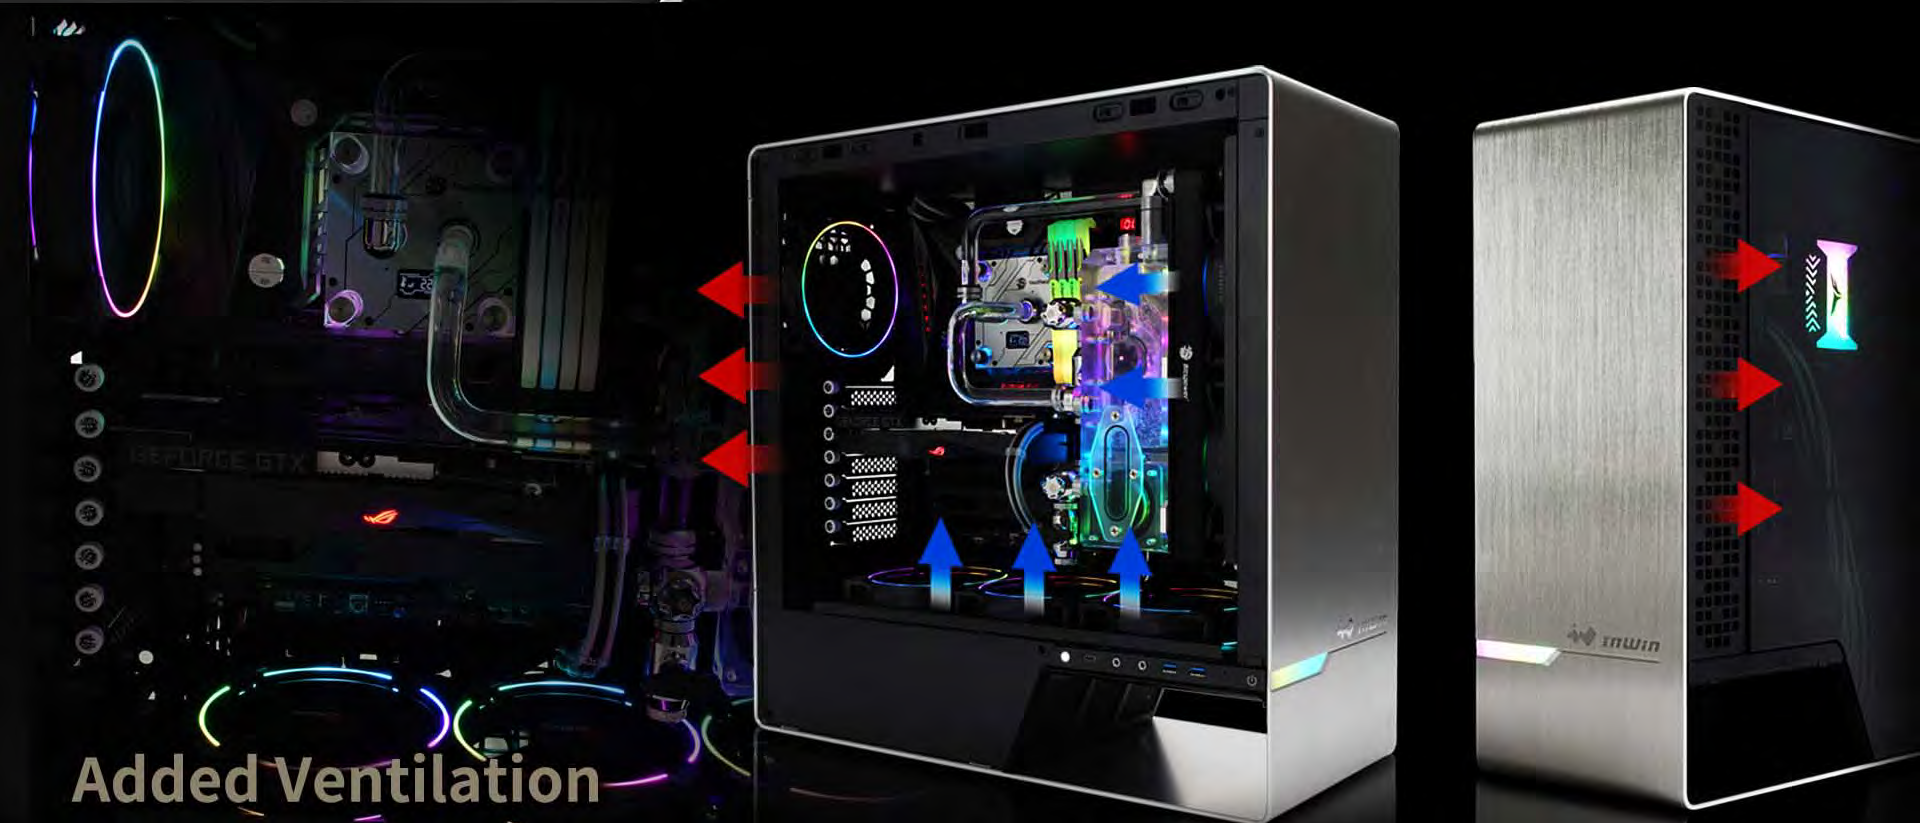

Added Ventilation

Ventilation is at a premium in the 905. The bottom incline serves as an area to both remove generated heat and intake cool air. The PSU chamber is at the bottom near the rear to quickly dispose of heat.The 905 can mount six total fans.

Specification

Model	905
Part Number	IW-905-SILADD IW-905-SILOLED
Colors	Silver (Addressable RGB) Silver (OLED)
Case Type	Mid Tower
Materials	Aluminium, Tempered Glass, SECC
M/B Compatibility	12” x 13” E-ATX , ATX , Micro-ATX , Mini-ITX
Expansion Slots	PCI-E x 7
Maximum Compatibility	VGA Card Length: 330mm CPU Heatsink Height: 160mm
I/O Ports	USB 3.1 Gen 2 Type-C x 1 USB 3.0 x 2



	HD Audio LED Lighting Control Switch or OLED Screen
Internal Drive Bays	1 x 3.5" 2 x 2.5" (2 pre-installed, max. up to 4)
Thermal Solution Compatibility	1 x 120mm Rear Fan / 120mm Radiator 2 x 120mm Front Fan / 240mm Radiator 2 or 3 x 120mm Bottom Fan /240 or 360mm Radiator
Power Supply Compatibility	PSII : ATX12V - Length up to 230mm
Product Dimension (H x W x D) with button & stand height	502 x 215 x 508mm 19.7" x 8.4" x 20"
Package Dimension (H x W x D)	337 x 611 x 592mm 13.2" x 24" x 23.3"
Net Weight	11.98kg / 26.4lb
Gross Weight	14.26kg / 31.44lb

* InWin products comply with RoHS regulations
* Specifications may vary based on different regions
* Pre-installed glass panel. Extra fee for closed panel.