






## Features & Benefits

- 1U appliance chassis with 15" depth for space-sensitive applications
- Utilizing space for HDD deployment to optimized HDD storage design
  - Dual 2.5" hot-swap storage bay for quick HDD maintenance
- Outstanding thermal exhaust efficiency supports 40 x 28mm PWM fan x 3 (pre-installed x 2)
  - Supports 1U Flex form factor PSU (up to 315W)
  - Optional PCIe riser card and riser card bracket
    - With two front access USB ports



## Specifications

|                                             |                                                                                                                                           |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Industry Standard                           | Compatible with EIA-RS310D standard 19" cabinets                                                                                          |
| M/B Form Factor                             | ATX (12" x 9.6")                                                                                                                          |
| Drive Bay                                   | <ul style="list-style-type: none"><li>• External: slim ODD x 1, hot-swap 2.5" x 2</li><li>• Internal: 3.5" HDD x 1</li></ul>              |
| Power Supply                                | Supports: <ul style="list-style-type: none"><li>• Form factor: Flex</li><li>• Watt: up to 315W</li></ul>                                  |
| Indicators                                  | Power status, HDD, LAN activity LEDs                                                                                                      |
| Front Control Panel                         | Power switch, system reset, USB 2.0 x 2                                                                                                   |
| Cooling Fans                                | Supports 40 x 28mm PWM fan x 3 (pre-installed x 2)                                                                                        |
| Expansion Slot                              | Full height PCIe slot x 1 (via riser card and bracket)                                                                                    |
| Material                                    | <ul style="list-style-type: none"><li>• Material: SGCC</li><li>• Thickness: 1.0mm</li></ul>                                               |
| Rail Kit                                    | Supports 20" friction slide rail                                                                                                          |
| Product Dimensions (DxWxH;<br>Chassis Only) | 393.2 x 430 x 43.5mm<br>(15.48" x 16.93" x 1.71")                                                                                         |
| Package Dimensions (DxWxH)                  | 592 x 518 x 155mm                                                                                                                         |
| Weight (Chassis Only)                       | <ul style="list-style-type: none"><li>• Net weight: 3.79kg</li><li>• Gross weight: 5.04kg</li></ul>                                       |
| Cubic Feet                                  | 1.68                                                                                                                                      |
| Container Information                       | Single packing with pallets: <ul style="list-style-type: none"><li>• 20': 440pcs</li><li>• 40': 968pcs</li><li>• 40'HQ: 1056pcs</li></ul> |

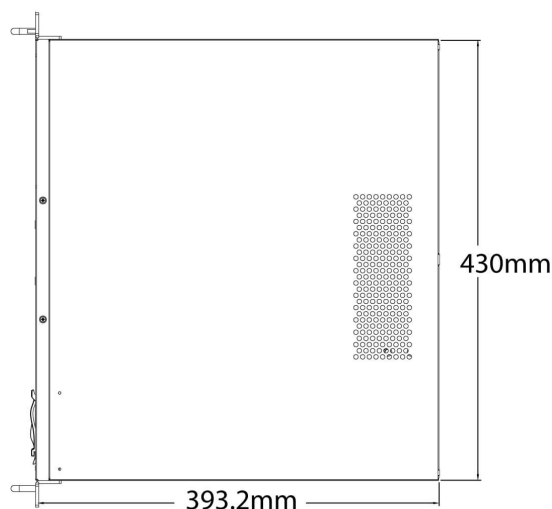

## Optional Items

| Item                  | Part Number    | Description                                                                                                                                               | Support |
|-----------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Slide Rail            | 3RAMIS032202   | 20" friction slide rails                                                                                                                                  | 1 set   |
| Cable                 | 3RAMW4024400   | SATA 7-pin to SATA 7-pin, 500mm                                                                                                                           | 2       |
| Power Supply          | 1DDW265AU20211 | IP-S265AU7-2, 1U Flex, 265W, 80 Plus Bronze                                                                                                               | 1       |
| Power Supply          | 1DDU315AU20222 | IP-P315AU7-2, 1U Flex, 315W, 80 Plus Gold                                                                                                                 | 1       |
| Power Supply          | 1DDU350BU20030 | IP-P350BU7-2, 1U Flex PSU, 350W, 80 Plus Platinum                                                                                                         | 1       |
| Power Supply          | 1DDU450BU20031 | IP-P450BU7-2, 1U Flex PSU, 450W, 80 Plus Platinum                                                                                                         | 1       |
| Fan                   | 3RAMFB010802   | 40 x 28mm, PWM, 14500RPM                                                                                                                                  | Max.3   |
| Riser Card            | 2RAKPD049200   | 1U PCIe Gen3 x16 lanes riser kit, ITX MB compatibility                                                                                                    | 1       |
| Riser Card            | 3RAMPD020200   | PCIe Gen3 x16 riser card, left-facing 90 degree design                                                                                                    | 1       |
| Riser Card            | 2RARIC026400   | 1U riser card bracket, ATX/mATX MB compatibility                                                                                                          | 1       |
| Back I/O Shield Plate | 2RAVIQ043300   | Rear I/O shield- DFI SD330                                                                                                                                | 1       |
| Back I/O Shield Plate | 2RAVIQ017900   | Rear I/O shield- Tyan S5535                                                                                                                               | 1       |
| Back I/O Shield Plate | -              | InWin can customize the I/O shield backplate for specific motherboards, with SGCC material to fulfill customers' specific I/O configuration requirements. | 1       |
| Others                | 2RAKPD046404   | USB 3.0 module                                                                                                                                            | 1       |

\* The actual product is subject to change without prior notice. In Win Development Inc. reserves the right to make any final modifications.

\* The above image is for reference only. All hardware components and optional parts are not included.